STRUIK
SINCE 1934

Pulling the ridges to the limit

WR

www.struikholland.nl

STRUIK
SINCE 1934

Wear-resistent springtines and ridgers on vibro springs

6WR564

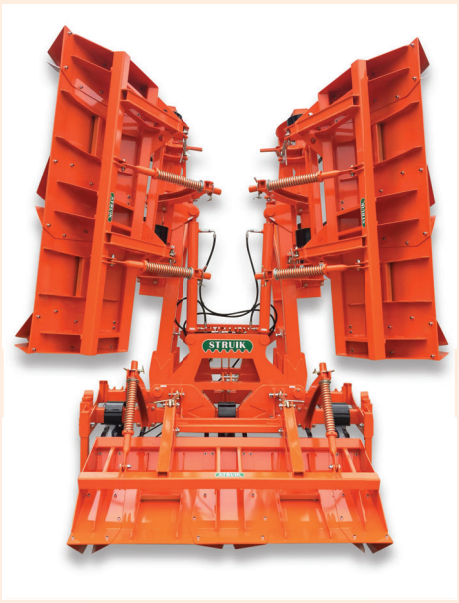

WR hydraulic foldable

WR Ridge former

The WR ridge former is designed for ridge shaping in light to medium soil types with or without stones. The machine is available in versions from 2x75cm/30" to 8x96cm/38". The ridge former is equipped as standard with wear-resistant springtines and ridgers mounted on a vibro-spring. The ridgers form the first small ridge, after which the ridging hood forms the final ridge.

STRENGTHS:

- Solid construction
- Easy adjustment
- Ridging hood with removable cover plates for ridging in tall crops
- Round or straight ridge shape

OPTIONS:

- Pressure units: stainless steel or steel with Multilene covering
- Full-width set
- Hydraulic foldable with hydraulic transport locking
- Depth control tires
- Track scraper, manual or hydraulic adjustment
- Removable ridging points

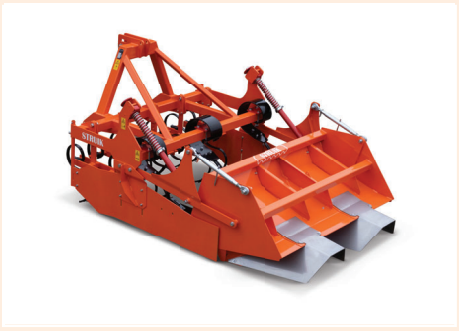

2WR165 2x75cm/30" with pressure units stainless steel

WR dimensions and weights

Type		min.		kg
2WR165 2x75cm/30"	1500	50hp/36kW	2x75cm/30"	740
2WR200 2x90cm/36"	1800	65hp/48kW	2x90cm/36"	790
4WR320 4x75cm/30"	3000	90hp/66kW	4x75cm/30"	950
4WR380 4x90cm/36"	3600	95hp/70kW	4x90cm/36"	1150
6WR465 6x75cm/30"	4500	120hp/88kW	6x75cm/30"	1400
6WR564 6x90cm/36"	5480	130hp/96kW	6x90cm/36"	1700
6WR595 6x96cm/38"	5800	140hp/103kW	6x96cm/38"	1760
8WR610 8x75cm/30"	6100	160hp/118kW	8x75cm/30"	1950
8WR742 8x90cm/36"	7320	180hp/132kW	8x90cm/8x36"	2100
8WR782 8x96cm/38"	7720	180hp/132kW	8x96cm/8x38"	2100

Illustrations, dimensions and weights may be altered without prior notice.

Struik Wieringermeer B.V. - Export B.V. Bedrijventerrein Robbenplaat 5000-6000 - Schelphorst 67-32 - 1771 SM Wieringerwerf - The Netherlands
Tel. +31(0)227-603144 - E-mail: struik@struikholland.nl - Website: www.struikholland.nl